




Weißlack Form-Profilüren WR

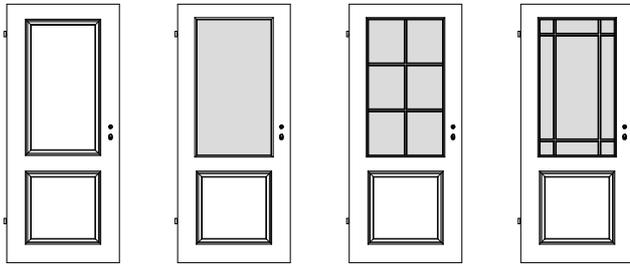


WR/2F

WR/2F-LA

WR/2F-SP6

WR/2F-SJ9

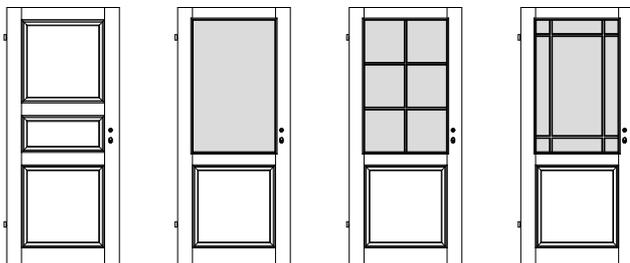


WR/3F

WR/3F-LA

WR/3F-SP6

WR/3F-SJ9

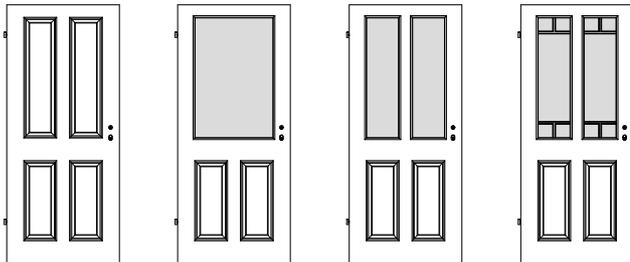

WR/4F


WR/4F-LA

WR/4F-2xLA *

WR/4F-2xSJ5 *

WR/4F-SP6

WR/4F-SJ9



Querschnitt von
Sprossenleiste / Glasleiste



WR/H4

WR/H4-LA


WR/H4-LA oben

WR/H4-3xLA *

WR/H4-SP6

WR/H4-SJ9


WR/H4-SP8

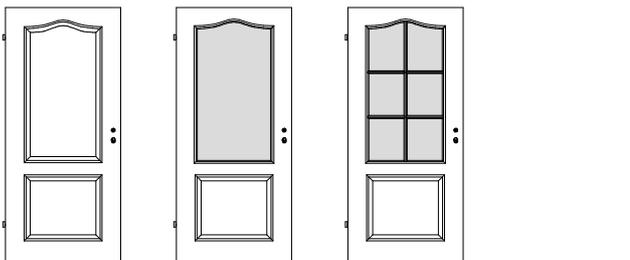

WR/2F-B

WR/2F-LA-B

WR/2F-SP6-B

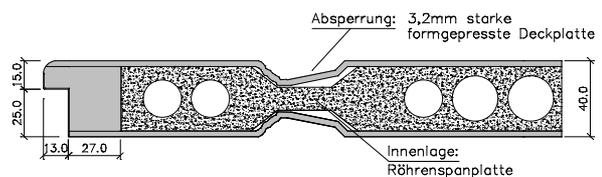

Überschlag **rund** (WR-Tür)

WR-Tür:

3-seitiger runder Überschlag,
Türstärke ca. 40 mm,
Mittellage Röhrenspanplatte,
Rahmen und Sockel aus MDF,
Decklage aus formgepresster,
3,2 mm starker MDF-Platte

BB-Schloss Stulp silberlack
2x Bandoberteile V0020 vernickelt

* Modell WR/4F-2xLA +
WR/4F-2xSJ5 + WR/H4-3xLA
nicht in 610 mm Türbreite

Türen können maximal 50 mm
gekürzt werden.

Sonderabmessungen sind auf Grund der industriell vorgeformten Deckplatte leider nicht lieferbar.